


INVITATION OF TENDER

District Nirmithi Kendra, Thiruvananthapuram invites tender from the competent firms/experienced contractors in prescribed form for Renovation of damaged road at Kalliyoor Kakkamoola ilavinvila Road.

Sl No	PARTICULARS	QTY	UNIT
1	Wet Mix Macadam Providing, laying, spreading and compacting graded stone aggregate to wet mix macadam specification including premixing the material with water at OMC in mechanical mixer (Pug Mill), carriage of mixed material by tipper to site, laying in uniform layers in sub-base/base course on a well prepared sub-base and compacting with smooth wheel roller of 80 to 100kN weight to achieve the desired density including lighting, barricading and maintenance of diversion, etc as per Tables 400.11 & 400.12 and Technical Specification Clause 406. By Mechanical Means with 1 km lead	20.250	cum
2	Modified Penetration Macadam 50 mm thick using Bitumen S-65 Construction of penetration macadam over prepared base by providing a layer of compacted crushed coarse aggregate using chips spreader with alternate applications of bituminous binder and key aggregates and rolling with a three wheel 80-100 kN static roller to achieve the desired degree of compaction as per Technical Specification Clause 506.	129.060	sqm
3	Prime Coat Medium porosity :- Providing and applying primer coat with Bitumen emulsion (SS-1) on prepared surface of granular base including cleaning of road surface and spraying primer at the rate of 0.90- 1.2 kg/sqm using mechanical means as per Technical Specification Clause 502	270	sqm
4	Tack Coat Providing and applying tack coat with Bitumen emulsion (RS-1) using emulsion distributor at the rate of	270	sqm

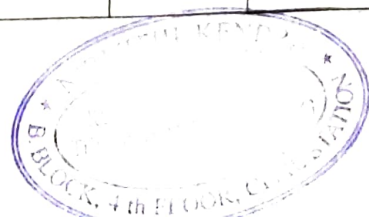

	0.25 to 0.30 kg per sqm on the prepared granular surfaces treated with primer & cleaned with Hydraulic broom as per Technical Specification Clause 503.		
5	Tack Coat Providing and applying tack coat with Bitumen emulsion (RS-1) using emulsion distributor at the rate of 0.20 to 0.25 kg per sqm on the prepared bituminous surface cleaned with Hydraulic broom as per Technical Specification Clause 503	2412	sqm
6	20mm thick Open-Graded Premix Carpet using Bituminous (penetration grade/modified bitumen) Binder - Bitumen S-65 Providing, laying and rolling of open-graded premix carpet of 20 mm thickness composed of 13.2 mm to 5.6 mm aggregates either using penetration grade bitumen or emulsion to required line, grade and level to serve as wearing course on a previously prepared base, including mixing in a suitable plant, laying and rolling with a three wheel 80-100 kN static roller capacity, finished to required level and grades to be followed by seal coat of either Type A or Type B or Type C as per Technical Specification Clause 508. Case - I By Manual Means (II)Bitumen (S-65)	2682	sqm
7	5.12.A.3.2a Seal Coat - Manual Means - Type C - Bitumen S-65 Providing and laying seal coat sealing the voids in a bituminous surface laid to the specified levels, grade and cross fall using Type A, Type B and Type C as per Technical Specification Clause 510 A.By Manual Means:-Case - III : Type C (II)Bitumen (S-65)	2682	sqm

2) Bid Price

- The contract shall be for the full quantity as described above. Corrections if any shall be made by crossing out re-writing with initial and date.
- The rate should be all inclusive of taxes, levies, transports etc.
- Usual deduction of taxes will be made from the gross amount of bill.
- The rate tendered by the bidder shall be fixed for the duration of the contract and shall not be subject to adjustment on any account.
- The price should be tendered in Indian rupees only.

- Each bidder shall submit only one tender.

TENDER NO.1086(1)/20/DNK
DISTRICT NIRMITHI KENDRA, THIRUVANANTHAPURAM
TENDER SCHEDULE

Sl.NO	PARTICULARS	QTY	UNIT	RATE	AMOUNT
1	Wet Mix Macadam Providing, laying, spreading and compacting graded stone aggregate to wet mix macadam specification including premixing the material with water at OMC in mechanical mixer (Pug Mill), carriage of mixed material by tipper to site, laying in uniform layers in sub-base/base course on a well prepared sub-base and compacting with smooth wheel roller of 80 to 100kN weight to achieve the desired density including lighting, barricading and maintenance of diversion, etc as per Tables 400.11 & 400.12 and Technical Specification Clause 406. By Mechanical Means with 1 km lead	20.250	cum		
2	Modified Penetration Macadam 50 mm thick using Bitumen S-65 Construction of penetration macadam over prepared base by providing a layer of compacted crushed coarse aggregate using chips spreader with alternate applications of bituminous binder and key aggregates and rolling with a three wheel 80-100 kN static roller to achieve the desired degree of compaction as per Technical Specification Clause 506.	129.060	sqm		
3	Prime Coat Medium porosity :- Providing and applying primer coat with Bitumen emulsion (SS-1) on	270	sqm		

	prepared surface of granular base including cleaning of road surface and spraying primer at the rate of 0.90- 1.2 kg/sqm using mechanical means as per Technical Specification Clause 502				
4	Tack Coat Providing and applying tack coat with Bitumen emulsion (RS-1) using emulsion distributor at the rate of 0.25 to 0.30 kg per sqm on the prepared granular surfaces treated with primer & cleaned with Hydraulic broom as per Technical Specification Clause 503.	270	sqm		
5	Tack Coat Providing and applying tack coat with Bitumen emulsion (RS-1) using emulsion distributor at the rate of 0.20 to 0.25 kg per sqm on the prepared bituminous surface cleaned with Hydraulic broom as per Technical Specification Clause 503	2412	sqm		
6	20mm thick Open-Graded Premix Carpet using Bituminous (penetration grade/modified bitumen) Binder - Bitumen S-65 Providing, laying and rolling of open-graded premix carpet of 20 mm thickness composed of 13.2 mm to 5.6 mm aggregates either using penetration grade bitumen or emulsion to required line, grade and level to serve as wearing course on a previously prepared base, including mixing in a suitable plant, laying and rolling with a three wheel 80-100 kN static roller capacity, finished to required level and grades to be followed by seal coat of either Type A or Type B or Type C as per Technical Specification Clause 508. Case - I By Manual Means (II)Bitumen (S-65)	2682	sqm		
7	5.12.A.3.2a Seal Coat - Manual Means - Type C - Bitumen S-65 Providing and laying seal coat sealing the voids in a bituminous surface laid to the	2682	sqm		

	specified levels, grade and cross fall using Type A, Type B and Type C as per Technical Specification Clause 510 A.By Manual Means:-Case - III : Type C (II)Bitumen (S-65)				
	TOTAL				

Gross Total Cost:- Rs.....
(In words) We agree to supply the above goods in accordance
 with the technical Specification for a total price of
 Rs.....(amount
 in figure)(amount in
 words) with in the period specified in the invitation for tender.

Signature of tenderer