


No: 1120/2020/NK/TVPM

Office of the Nirmithi Kendra,
B Block, 4th Floor, Civil Station,
Kudappanakunnu, Thiruvananthapuram.
pnmirmithi@gmail.com,0471-2732929
20.02.2021

Quotation notice for Interior works at NIC

District Nirmithi Kendra invites Competitive quotations from authorized Contractors in the form attached herewith for Interior works in District Nirmithi Kendra's Project site at Interior works at NIC at Collectorate.

	Item	Qty	Unit
1.	Dismantling aluminium / Gypsum partitions, doors, windows, fixed glazing and false ceiling including disposal of unserviceable surplus material and stacking of serviceable material within 50 metres lead as directed by Engineer - in-Charge	21.735	sqm
2.	Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections/ appropriate Z sections and other sections of approved make conforming to IS : 733 and IS: 1285, fixing with dash fasteners of required dia and size, including necessary filling up the gaps at junctions, i.e. at top, bottom and sides with required EPDM rubber/ neoprene gasket etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, Aluminium snap beading for glazing /paneling, C.P. brass/ stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-charge.(Glazing, paneling and dash fasteners to be paid for separately):For fixed portion Powder coated aluminium (minimum thickness of powder coating 50 micron)	74.056	Kg
3.	Providing and fixing 12 mm thick prelaminate particle board flat pressed three layer or graded wood particle board conforming to IS : 12823 Grade I Type II, in panelling fixed in aluminum doors, windows shutters and partition frames with C.P. brass / stainless steel screws etc. complete as per architectural drawings and directions of Engineer - in-Charge.Pre- laminated particle board with decorative lamination on both sides	29.491	sqm
	Providing and fixing glazing in aluminium door, window, ventilator shutters and partitions etc. with		

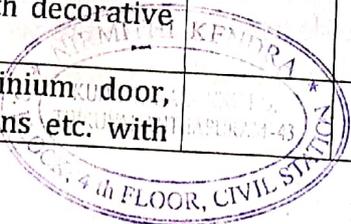

4.	EPDM rubber / neoprene gasket etc. complete as per the architectural drawings and the directions of Engineer - in -Charge. (Cost of aluminium snap beading shall be paid in basic item);With float glass panes of 4.0 mm thickness.	4.388	sqm
5.	Providing and fixing M.S. Grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. including priming coat with approved steel primer all complete.Fixed to steel windows by welding	38.925	kg
6.	Providing and fixing powder coated aluminium work (minimum thickness of powder coating 50 micron) consisting of tee /angle sections, of approved make conforming to IS : 733 in frames of false ceiling including aluminium angle cleats with necessary C.P brass/ stainless steel sunk screws, aluminium perimeter angles fixed to wall with stainless steel rawl plugs @ 450 mm centre to centre and fixing the frame work to G.I level adjusting hangers 6 mm dia. with necessary cadmium plated machine screws all complete as per approved architectural drawings and direction of the Engineer-in-Charge (level adjusting hangers, ceiling cleats and expansion hold fasteners to be paid for separately).	31.50	kg
7	Providing and fixing ISI marked oxidised M S door latches conforming to IS : 5930 with screws etc.300x20x6 mm	2	Nos
8	Providing and fixing ISI marked oxidised M.S. handles conforming to IS : 4992 with necessary screws etc. complete:125 mm	2	Nos
9	Supply and Fixing Work Station made out of 17 /25mm thk prelam partical board of approved make cladde with 2mm/.6mm edge bonding finsh as per design . The table top 25mm post forming finish. the table also includes pencil drawer units , keyboard tray,Epc lock, SS handle,Epc box hinges,CPU Stand and necessary hardwares are included for prior approval . Size :1000 x 600x 750	2	Nos
10	Supply medium back revolving chair	6	Nos
11	Electrical and networking connections		LS

2) Bid Price

- The contract shall be for the full quantity as described above. Corrections if any shall be made by crossing out re-writing with initial and date.
- The rate should be all inclusive of taxes, levies, transports etc.
- Usual deduction of taxes will be made from the gross amount of bill.

- d) The rate quoted by the bidder shall be fixed for the duration of the contract and shall not be subject to adjustment on any account.
 - e) The price should be quoted in Indian rupees only.
- 3) Each bidder shall submit only one quotation.

4) Validity of quotation

Quotation shall remain valid for a period not less than 45 days after the dead line date specified for submission

5) Evaluation of quotation

The purchaser will evaluate and compare the quotations determined to be substantially responsive i.e., which

- a) Are properly signed
- b) Confirm to the terms and conditions and specification.

6) Award of Contract

a) The purchaser will award the contract to the bidder whose quotations has been determined to be substantially responsive and who has offered the lowest evaluated quotation price

- b) Not with standing above, the purchaser reserves the right to accept or reject any quotations and to cancel the bidding process and reject all quotations at anytime prior to the award of the contract
- c) The bidder whose bid is accepted will be notified of the award of the contract by the purchaser prior to expiration of the quotation validity period. The terms of the accepted offer shall be incorporated in the purchase order.

7) The amount will be released after verification of the material in physical, quality and receipt of invoice in this office according to the availability of funds. Individual or Authorized dealers/agents are only eligible.

8) You are requested to provide your offer latest by 12 hours on 26.02.2021 and the Quotation will be opened at 26.02.2021.

We look forward to receiving your quotations and thank for your interest in this work.



[Handwritten Signature]
Project Manager

FORMAT OF QUOTATION

	Item	Qty	Unit	Amount	Total
1.	Dismantling aluminium / Gypsum partitions, doors, windows, fixed glazing and false ceiling including disposal of unserviceable surplus material and stacking of serviceable material within 50 metres lead as directed by Engineer - in-Charge	21.735	sqm		
2.	Providing and fixing aluminium work for doors, windows, ventilators and partitions with extruded built up standard tubular sections/ appropriate Z sections and other sections of approved make conforming to IS : 733 and IS: 1285, fixing with dash fasteners of required dia and size, including necessary filling up the gaps at junctions, i.e. at top, bottom and sides with required EPDM rubber/ neoprene gasket etc. Aluminium sections shall be smooth, rust free, straight, mitred and jointed mechanically wherever required including cleat angle, Aluminium snap beading for glazing /paneling, C.P. brass/ stainless steel screws, all complete as per architectural drawings and the directions of Engineer-in-charge.(Glazing, paneling and dash fasteners to be paid for separately):For fixed portion Powder coated aluminium (minimum thickness of powder coating 50 micron)	74.056	Kg		
3.	Providing and fixing 12 mm thick prelaminated particle board flat pressed three layer or graded wood particle board conforming to IS : 12823 Grade I Type II, in panelling fixed in aluminum doors, windows shutters and partition frames with C.P. brass / stainless steel screws etc. complete as per architectural drawings and directions of Engineer - in-Charge.Pre- laminated particle board with decorative lamination on both sides	29.491	sqm		
	Providing and fixing glazing in aluminium door, window, ventilator shutters and partitions etc. with EPDM				

4.	rubber / neoprene gasket etc. complete as per the architectural drawings and the directions of Engineer - in -Charge. (Cost of aluminium snap beading shall be paid in basic item):With float glass panes of 4.0 mm thickness.	4.388	sqm		
5.	Providing and fixing M.S. Grills of required pattern in frames of windows etc. with M.S. flats, square or round bars etc. including priming coat with approved steel primer all complete.Fixed to steel windows by welding	38.925	kg		
6.	Providing and fixing powder coated aluminium work (minimum thickness of powder coating 50 micron) consisting of tee /angle sections, of approved make conforming to IS : 733 in frames of false ceiling including aluminium angle cleats with necessary C.P brass/ stainless steel sunk screws, aluminium perimeter angles fixed to wall with stainless steel rawl plugs @ 450 mm centre to centre and fixing the frame work to G.I level adjusting hangers 6 mm dia. with necessary cadmium plated machine screws all complete as per approved architectural drawings and direction of the Engineer-in-Charge (level adjusting hangers, ceiling cleats and expansion hold fasteners to be paid for separately).	31.50	kg		
7	Providing and fixing ISI marked oxidised M S door latches conforming to IS : 5930 with screws etc.300x20x6 mm	2	Nos		
8	Providing and fixing ISI marked oxidised M.S. handles conforming to IS : 4992 with necessary screws etc. complete:125 mm	2	Nos		
9	Supply and Fixing Work Station made out of 17 /25mm thk prelam partical board of approved make clad with 2mm/.6mm edge bonding finsh as per design . The table top 25mm post forming finish. the table also includes pencil drawer units , keyboard tray,Epc lock, SS handle,Epc box hinges,CPU Stand and necessary hardwares are included for prior approval . Size :1000 x 600x 750	2	Nos		
10	Supply medium back revolving chair	6	Nos		
11	Electrical and networking connections		LS		

Gross Total Cost: - Rs.....(In words) We agree to supply the above goods in accordance with the technical Specification for a total price of Rs.....(amount in figure)(amount in words) with in the period specified in the invitation for quotation.

Signature of Quotationer